




UniFi Express

UX

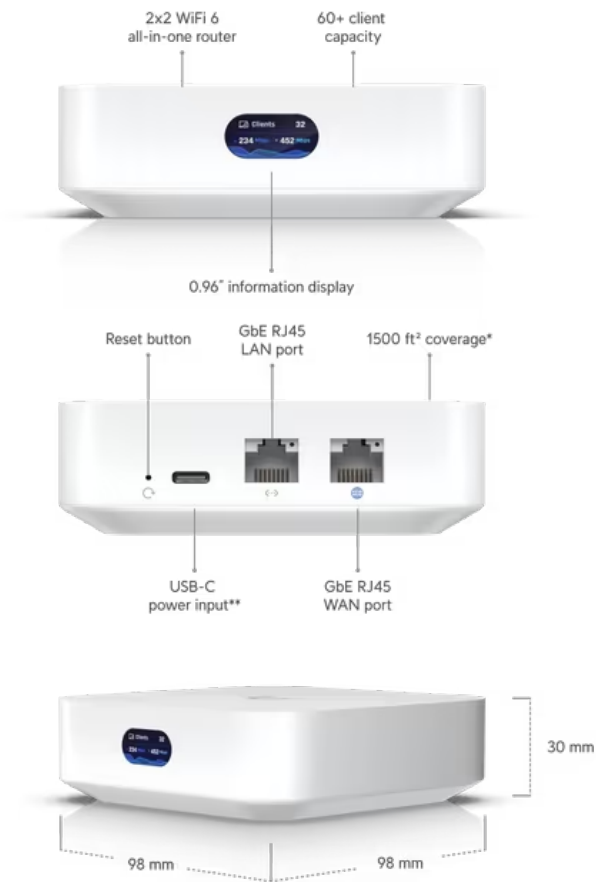

* 1500 ft² coverage for single unit, 3000-4500 ft² coverage mesh with 2-3 units.

**5V DC, 3A USB-C adapter included.

Mechanical

Dimensions 98 x 98 x 30 mm (3.6 x 3.6 x 1.2")

Weight 302 g (10.7 oz)

Enclosure material Polycarbonate

Hardware

Networking interface (1) GbE RJ45 WAN port
(1) GbE RJ45 LAN port

Management interface Ethernet
Bluetooth

Power method	USB type C (5V DC/3A)
Max. power consumption	10W
Max. WiFi TX power	
2.4 GHz	22 dBm
5 GHz	25 dBm
MIMO	
2.4 GHz	2 x 2 (DL/UL MU-MIMO)
5 GHz	2 x 2 (DL/UL MU-MIMO)
Throughput rate	
2.4 GHz	573.5 Mbps
5 GHz	2.4 Gbps
Antenna gain	
2.4 GHz	4 dBi
5 GHz	5.15 dBi
Antennas	(2) Internal 2.4G/5G WiFi dual-band antenna (1) Internal 2.4G single-band BT antenna
LCM display	0.96" status display
Button	Factory reset
Operating temperature	-10 to 45° C (14 to 113° F)
Operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

Software

WiFi standards	802.11a/b/g WiFi 4/WiFi 5/WiFi 6
Wireless security	WPA-PSK, WPA-Enterprise (WPA/WPA2/WPA3)
BSSID	Console mode: 3 per band Standard AP: 8 per band
VLAN	802.1Q
Advanced QoS	Per-user rate limiting
Guest traffic isolation	Supported
Concurrent clients	60+
Zero wait DFS	Yes

Supported Data Rates

802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps
802.11b	1, 2, 5.5, 11 Mbps
802.11g	6, 9, 12, 18, 24, 36, 48, 54 Mbps
802.11n (WiFi 4)	6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)
802.11ac (WiFi 5)	6.5 Mbps to 1.7 Gbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80/160)
802.11ax (WiFi 6)	7.3 Mbps to 2.4 Gbps (MCS0 - MCS11 NSS1/2, HE 20/40/80/160)

Application Requirements

UniFi Network	Version 8.0.7 and later
----------------------	-------------------------